
UNLEASH YOUR **VISION,** _____ DESIGN

DESIGN YOUR WORLD

TERRAZZO MATT
COLLECTION 600x1200mm



COLLECTIONS TO SATISFY ALL YOUR NEEDS

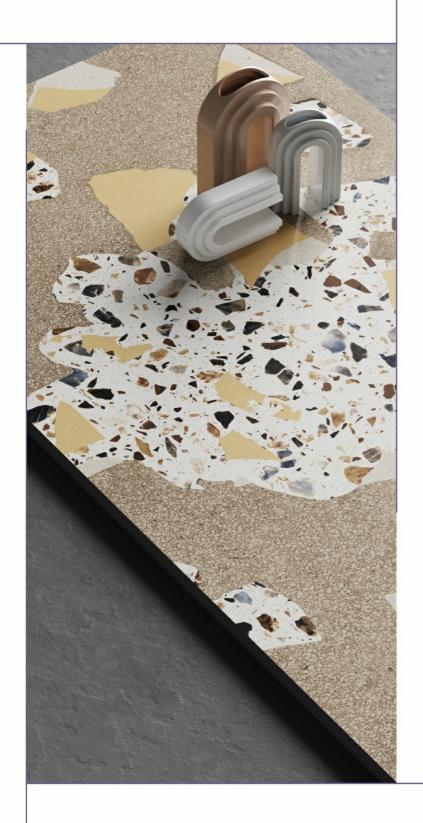













600x1200mm

Embrace a timeless aesthetic with the pure elegance of a MATT surface. Uncompromising in simplicity, these tiles redefine spaces with a subdued yet refined charm

SIZE & THICKNESS



Dimensions

9MM | 600x1200mm | 60x120cm 8.5 MM | 600x600mm | 60x60cm



FEATURES & ADVANTAGES





Bending Strength



Hygienic Surface



Resistant To Ice & Frost



Color Stability



Dimensional Stability



Repellent Surface



Fire & High Temperature Resistant



o To

600x600


9mm Thickness 85mm Thicknes

3 Face 6 Face





600x1200mm | 9mm Thickness | 2 Face 600x600mm | 8.5mm Thickness | 4 Fac

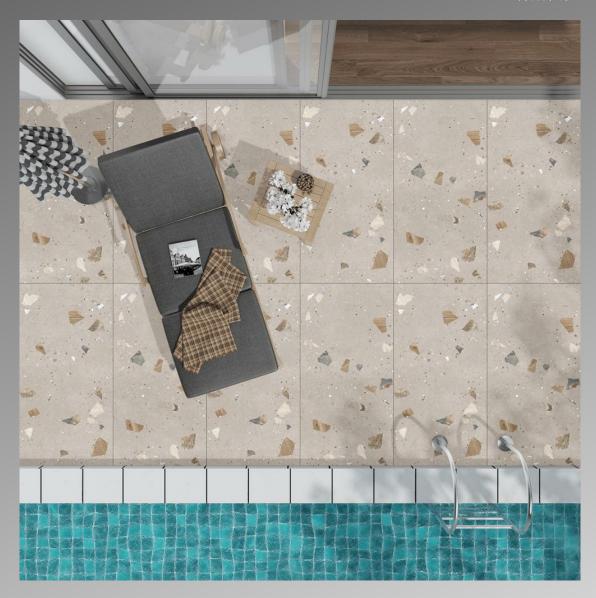




600x1200mm | 600x600mm |

9mm Thickness 85mm Thickness 2 Face / Face



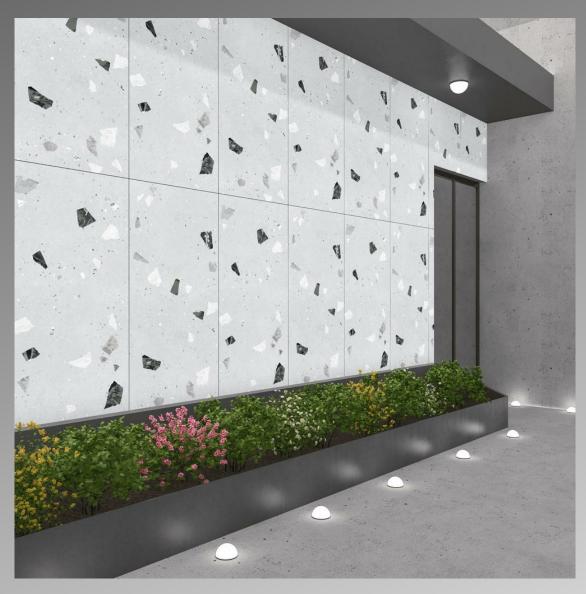



600x1200mm | 9mm Thickness | 1 Face 600x600mm | 8.5mm Thickness | 2 Face
















600x1200mm | 9mm Thickness | 1 Face 600x600mm | 8.5mm Thickness | 2 Fac

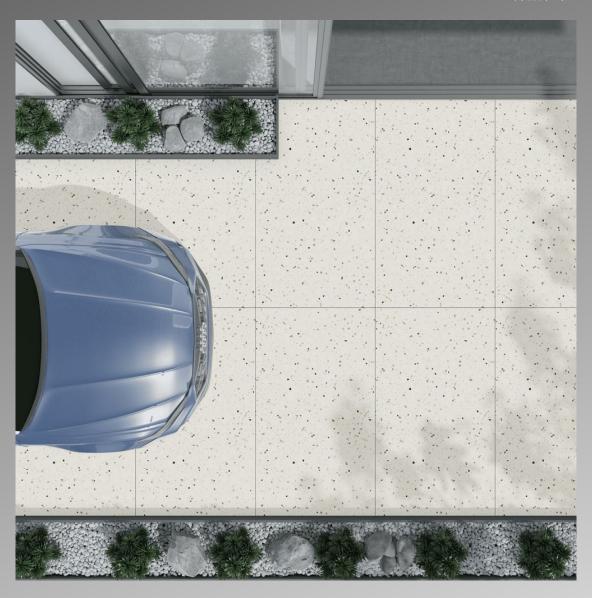




600x600mi

9mm Thickness 85mm Thicknes race 2 Face



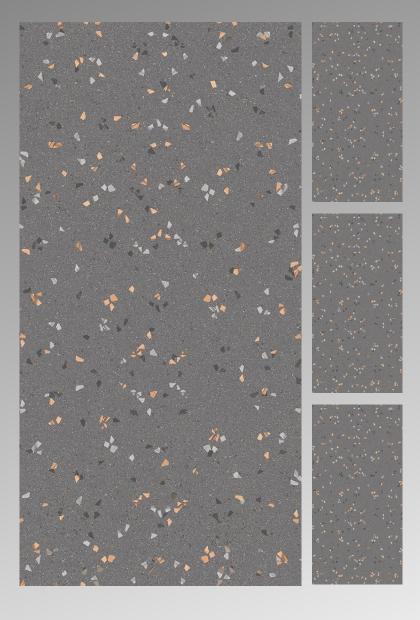

600x1200mm | 9mm Thickness | 1 Face 600x600mm | 8.5mm Thickness | 2 Face






600x1200mr

9mm Thickness 85mm Thicknes


4 Face






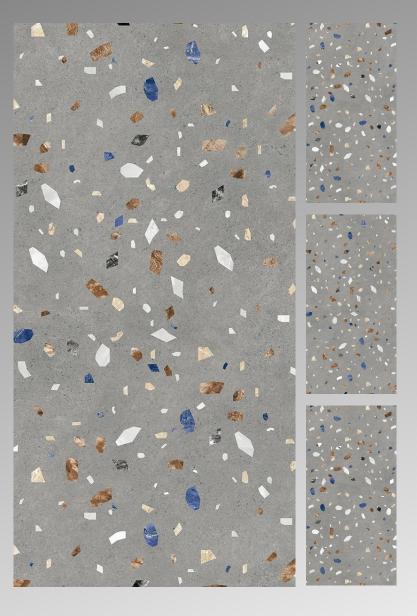

600x1200mm | 9mm Thickness | 2 Face 600x600mm | 8.5mm Thickness | 4 Face

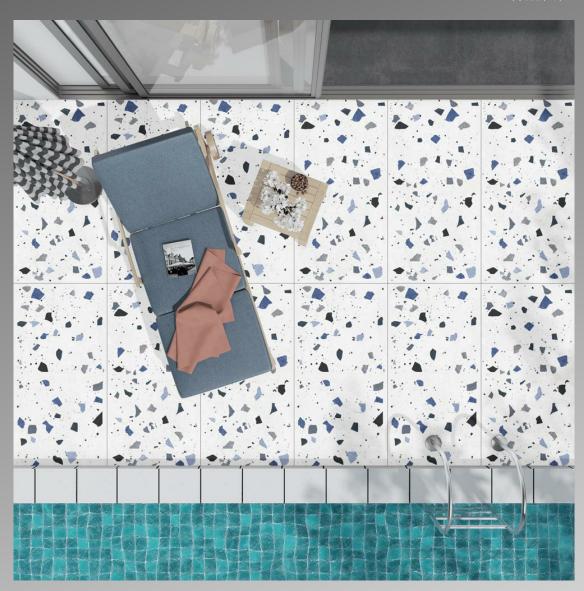

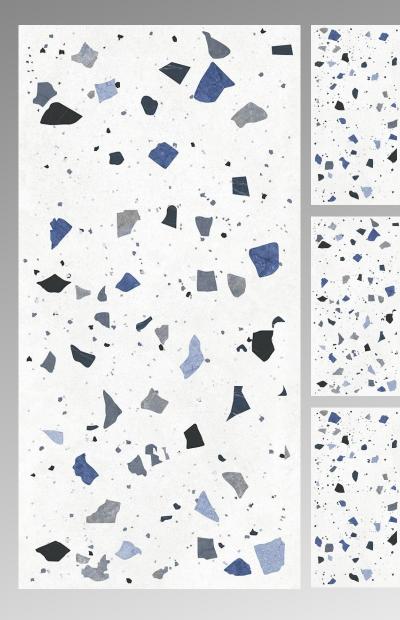

600x1200mm

9mm Thickness 85mm Thicknes 2 Face / Face

ess









600x1200mm

9mm Thickness

4 Face



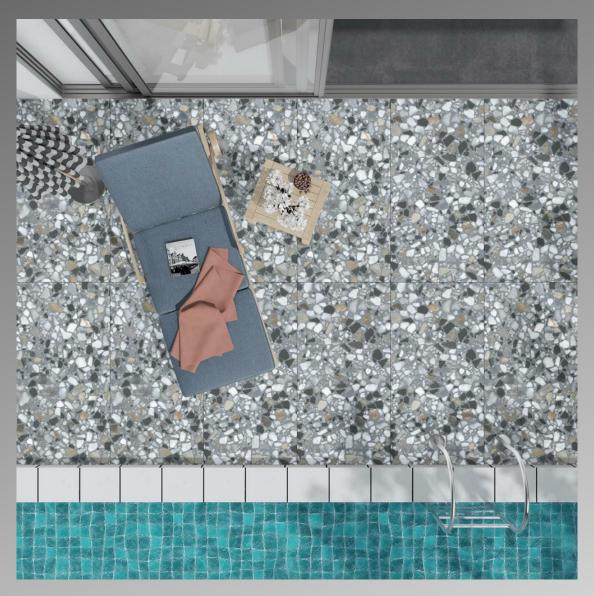

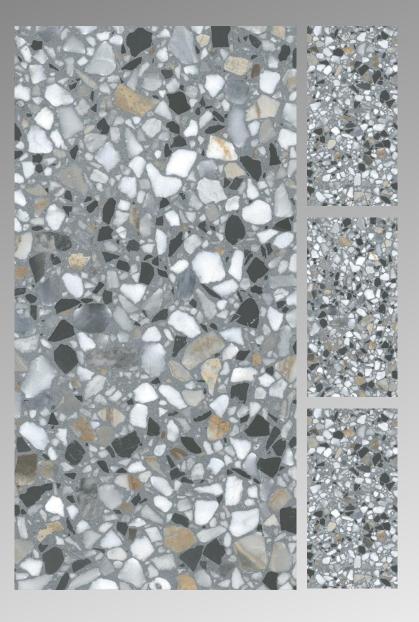








600x1200mm

9mm Thickness

z race 4 Face



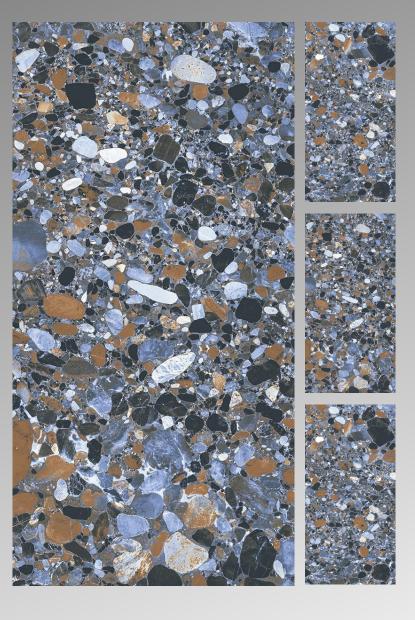

600x1200mm | 9mm Thickness | 600x600mm | 8.5mm Thickness |

2 Face








600x600

9mm Thickness
8 5mm Thickness


+ Face - 8 Face





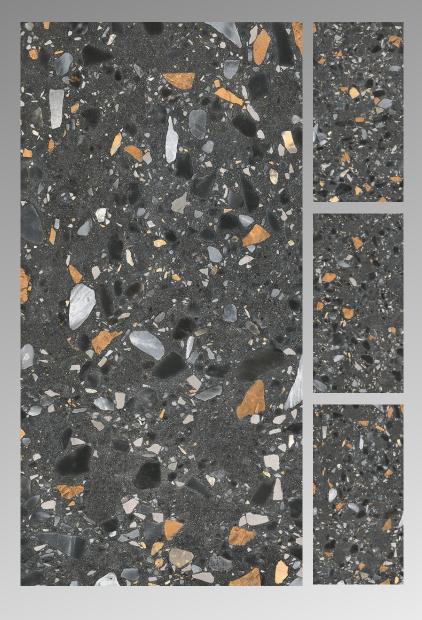



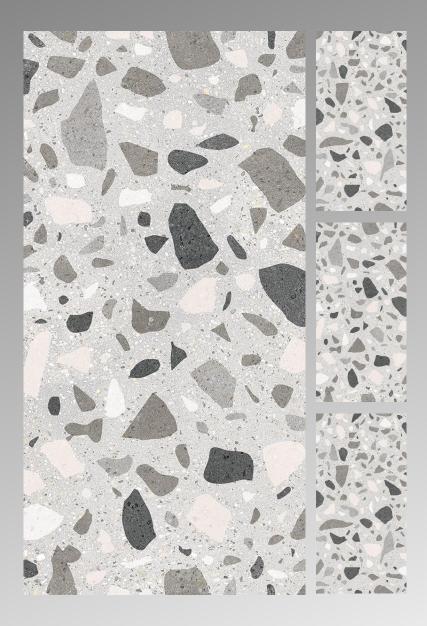





600x1200mm

9mm Thickness

l Face / Face







600x1200mm 600x600mm 9mm Thickness 85mm Thicknes

4 FUCE 8 Face














600x600mr

9mm Thickness 85mm Thicknes

8 Face





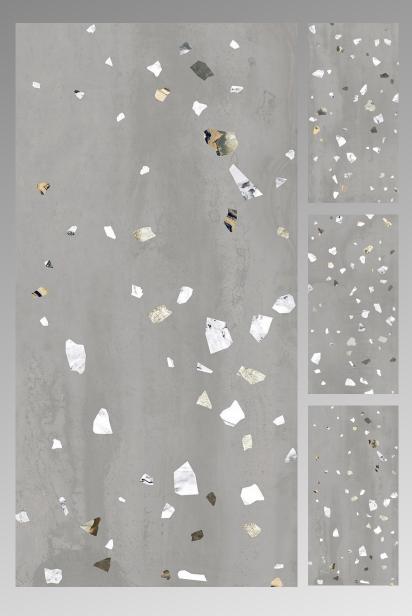

600x1200mr 600x600mm 9mm Thickness
8 5mm Thicknes








600x1200m 600x600mr 9mm Thickness 85mm Thicknes





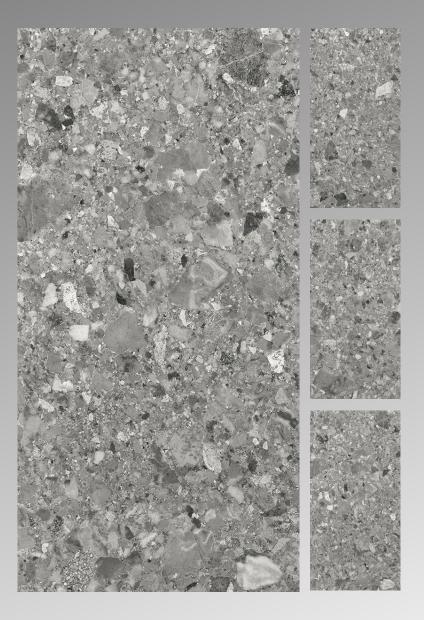

600x1200mr

9mm Thickness 85mm Thicknes







000x1200mm | 9mm Thickness 000x600mm | 8.5mm Thickness








600x1200mm | 9mm Thickness | 4 Fa 600x600mm | 8.5mm Thickness | 8 F

8 Face



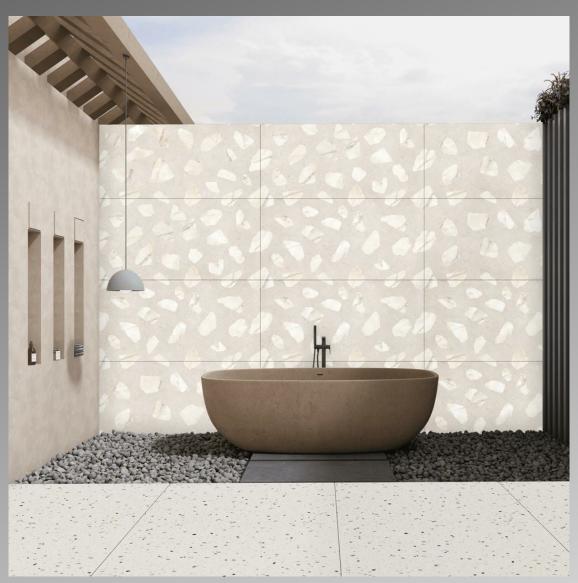



600x1200mr 600x600mm 9mm Thickness 85mm Thicknes












600x1200mm | 9mm Thickness | 2 Face 600x600mm | 8.5mm Thickness | 4 Fac



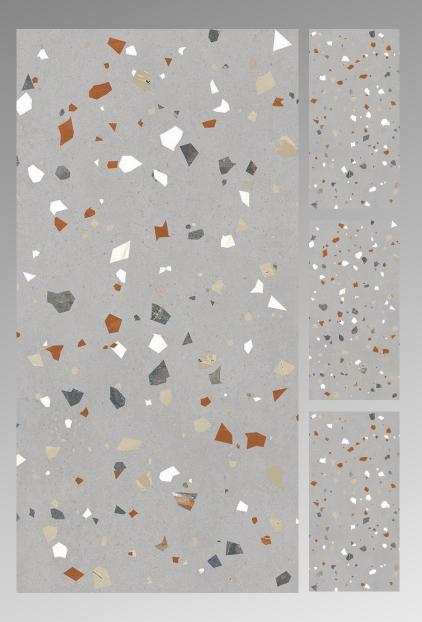

600x60

9mm Thickness

2 Face 7 Face







600x1200mm | 9mm 1nicki 600x600mm | 8.5mm Thic 2 Face






600x1200mm | 9n 600x600mm | 8.5

8 5mm Thickness

12 Face



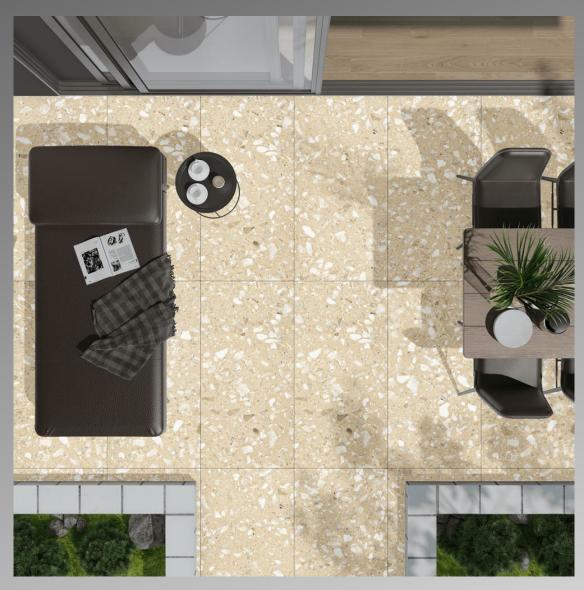




600

9mm Thickness

6 Face 12 Face



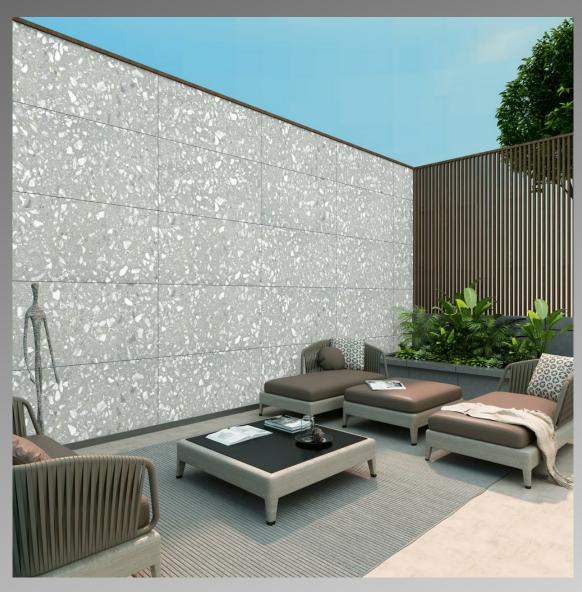







600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Face








600x1200mm | 9 600x600mm | 8

9mm Inickness 8.5mm Thicknes 4 Face 8 Face





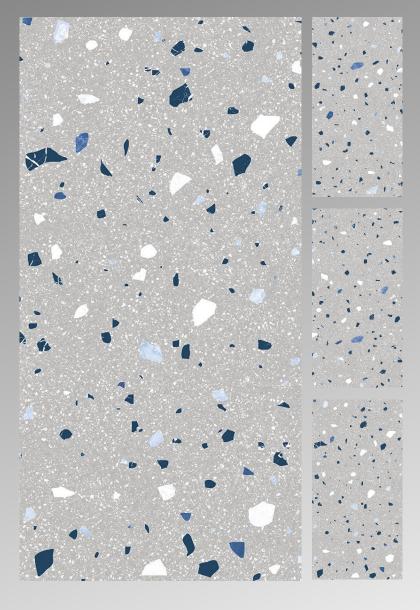


600x600mr

9mm Thickness 8.5mm Thicknes 4 Face 8 Face






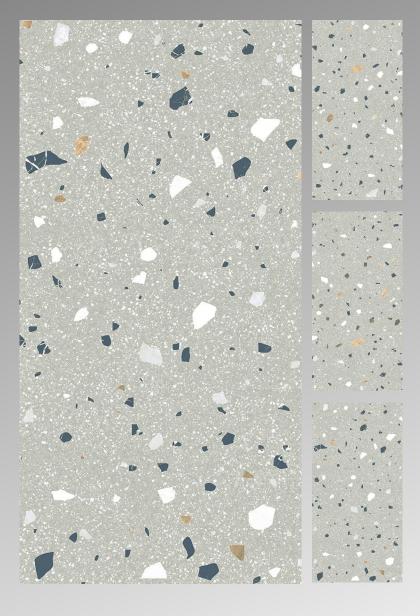

500x1200mm | 9mm Thickness | 4 Face 500x600mm | 8.5mm Thickness | 8 Face

Matt

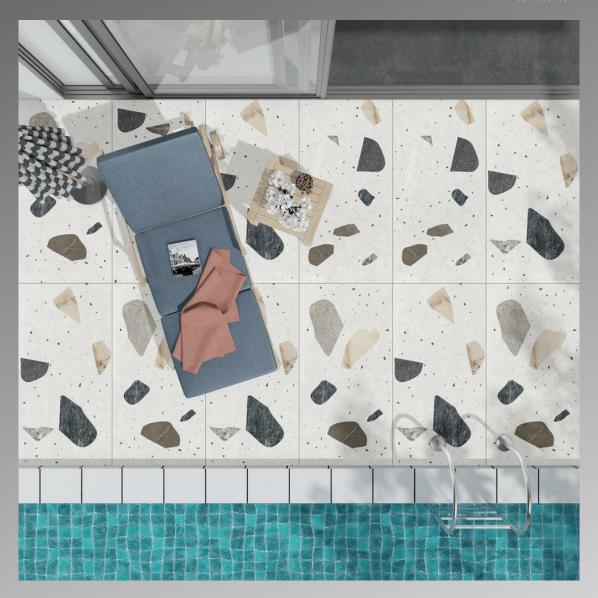



600x1200mm

9mm Inickness 8.5mm Thicknes 4 Face 8 Face

Matt









600x1200mm

9mm Inickness 8.5mm Thickness 4 Face 8 Face







600x1200mm

9mm Thickness

+ race - 8 Face








Matt




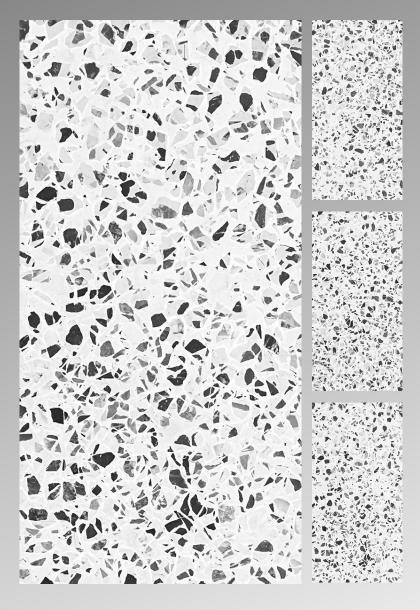







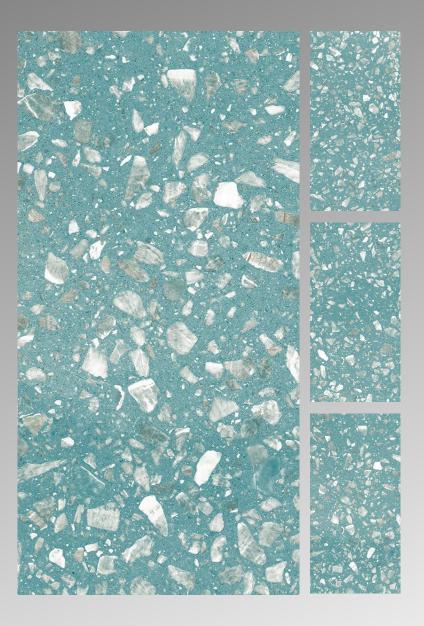


600x1200m 600x600mi 9mm Thickness 85mm Thicknes

6 Face





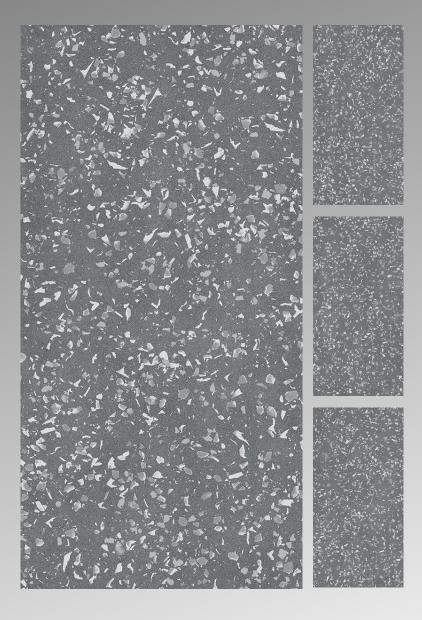

600x600mr

9mm Thickness

6 Face







600x1200mm

9mm Thickness 85mm Thicknes

+ FUCE - 8 Face







Finish

MATT

600x1200mm | 9mm Thickness | 3 Face

600x600mm | 8.5mm Thickness | 6 Face






Finish

MATT

600x1200mm | 9mm Thickness | 3 Face

600x600mm | 8.5mm Thickness | 6 Fac



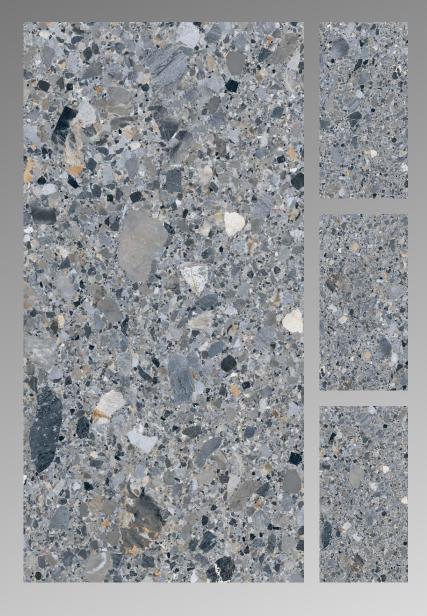


Finish

MATT

600x1200mm | 9mm Thickness | 2 Face

600x600mm | 8.5mm Thickness | 4 Face



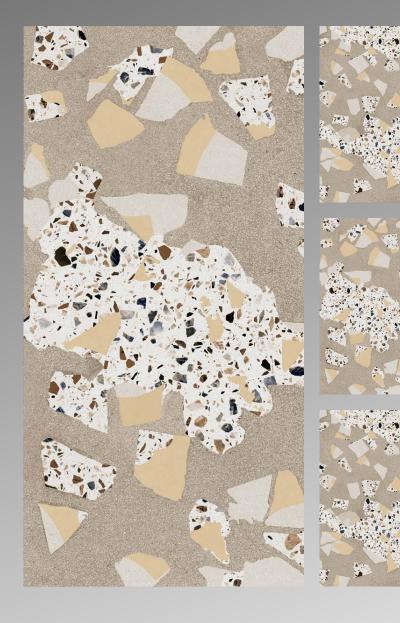


Finish

MATT

600x1200mm | 9mm Thickness | 2 Face

600x600mm | 8.5mm Thickness | 4 Fac



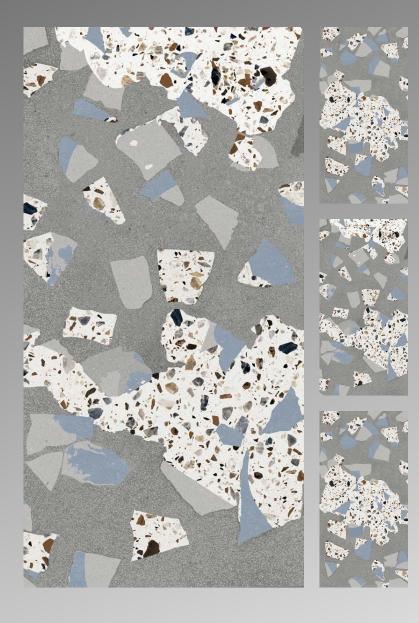

Technical Detail

SRNO. CHARACTERISTICS ISO TEST METHODS	TILES REQUIREMENT AS PER ISO 13006 : 2012 GROUP B LLB	SISCON VALUE
--	---	--------------

DIMENSION & SURFACE QUALITY

1	Deviation in length & Width	ISO 10545-2	+/-0.5%	+/-0.2%
	Deviation in Thickness	ISO 10545-2	+/-5%	+/-3%
	Straightness Of sides	ISO 10545-2		+/-0.2%
4	Rectangularity	ISO 10545-2	+/-0.5%	+/-0.2%
5	Surface Flatness	ISO 10545-2	+/-0.5%	+/-0.2%

PHYSICAL & THERMAL PROPERTIES

	Water Absorption	ISO 10545-3 <0.50%		
	Mohs Hardness	EN-101	Min.5	Min.5
	Flexural Strength	ISO 10545-4		
	Skid Resistance	ISO 10545-17	>0.4	>0.4
5	Breaking Strength	ISO 10545-11	>1113N	>1800N
	Frost Resistance	ISO 10545-12	Frost Proof	
	Thermal Shock Resistance	ISO 10545-9	No Damage	
	Moisture Expansion	ISO 10545-10		
	Resistance to surface Abrasion	ISO 10545-7		

CHEMICAL PROPERTIES

		No Damage		
		Resistant		

PACKAGING DETAIL

SIZE	PCS./BOX	SQM./BOX	APPROX WEIGHT/BOX	THICKNESS
				9мм
				8.5MM