

UNLEASH YOUR **VISION**,

DESIGN YOUR WORLD

WOOD MATT COLLECTION

600x1200mm



COLLECTIONS TO SATISFY ALL YOUR NEEDS















600x1200mm


Embrace a timeless aesthetic with the pure elegance of a MATT surface. Uncompromising in simplicity, these tiles redefine spaces with a subdued yet refined charm

SIZE & THICKNESS



Dimensions

9MM | 600x1200mm | 60x120cm 8.5 MM | 600x600mm | 60x60cm

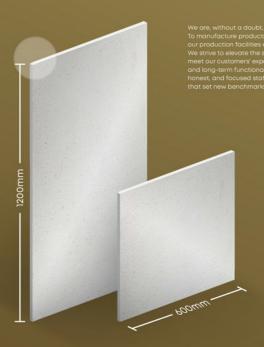

FEATURES & ADVANTAGES





Strength



Hygienic Surface



Resistant To Ice & Frost



Color Stability



Dimensional Stability



Repellent Surface



Fire & High Temperature Resistant



Resista To Stain







500x1200mm | 9mm Thickness | 4 Face 500x600mm | 8.5mm Thickness | 8 Fac







000x1200mm | 9mm 000x600mm | 8.5mr

6 | 1Fa 66 | 2E

. 400 2 Face







600x1200mm

9mm Thickness

6 Face
















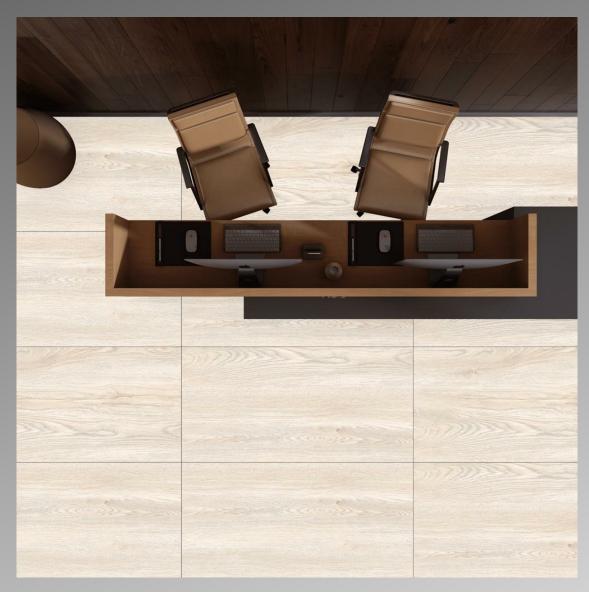















600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Fac











600x1200mm

9mm Thickness

4 FUCE 8 Face

ckness | 8













600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Fac











600x1200mm

9mm Thickness 85mm Thicknes

8 Face
















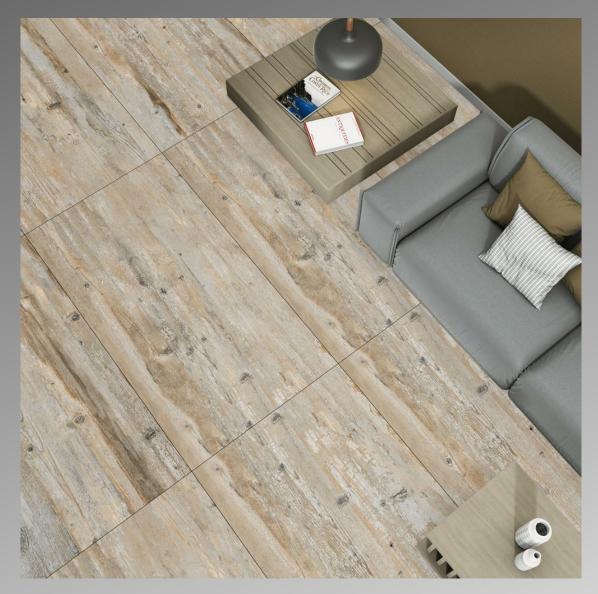









600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Fac






600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Face





600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Fac

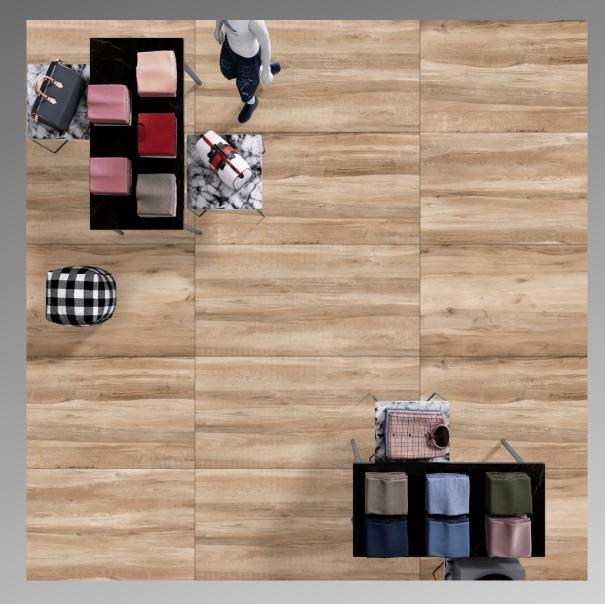




600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Face





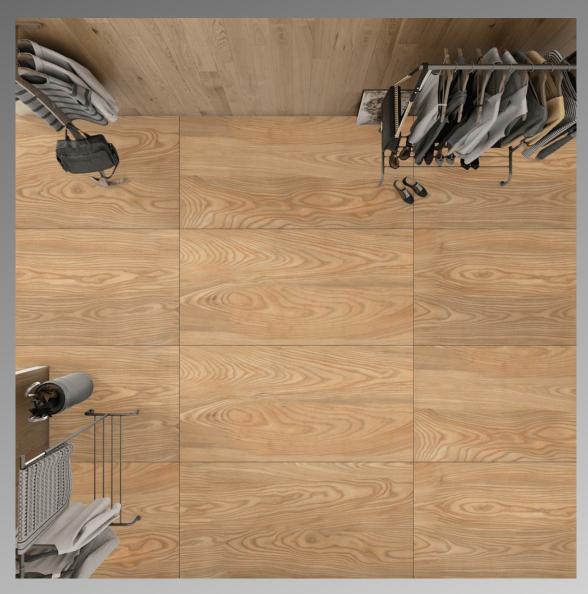

600x1200mm | 9mm 600x600mm | 8.5m

}mm Thickness 8.5mm Thickness

8 Face








500x1200mm | 9mm Thickness | 4 Face 500x600mm | 8.5mm Thickness | 8 Face



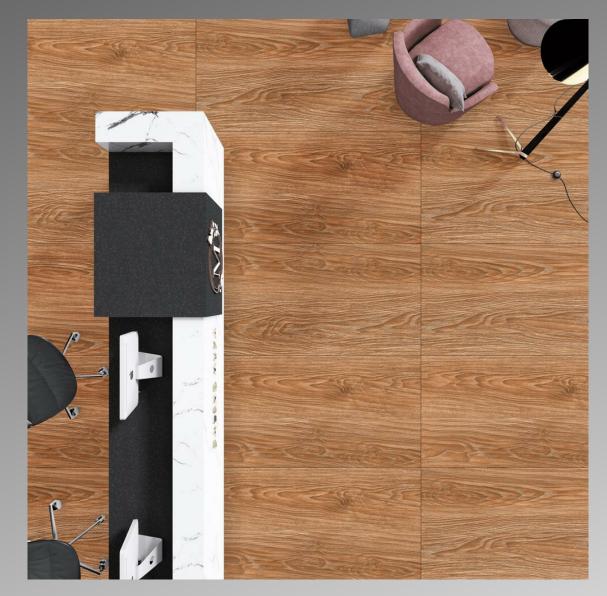



600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Fac







600x1200mm

9mm Thickness

4 Face 8 Face













500x1200mm | 9mm Thickness | 4 Face 500x600mm | 8.5mm Thickness | 8 Fac













600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Face





WOOD





600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Face













600x1200mm | 9mm

9mm Thickness







600x1200mm | 9r

9mm Thickness







600x1200mm | 9mm Tl 600x600mm | 8.5mm

Thickness | 0 Fc m Thickness | 0 F







600x1200mm

9mm Thickness







600x1200mm | 600x600mm

9mm Thickness







600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Fac







600x1200mm | 9mm Thickness | 2 Face 600x600mm | 8.5mm Thickness | 4 Face








600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Face

WOOD



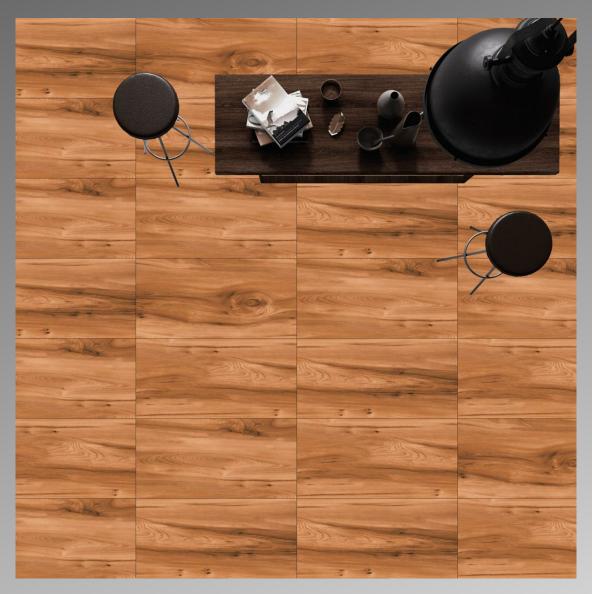

500x1200mm | 9mm Thickness | 4 Face 500x600mm | 8.5mm Thickness | 8 Face

Wood





600x1200mm | 9mm Thickness | 4 Face 600x600mm | 8.5mm Thickness | 8 Face













600x1200mm | 9mm Thickness | 3 Face 600x600mm | 8.5mm Thickness | 6 Face







600x1200mm | 9r 600x600mm | 8

9mm Thickness







WOOD





600x1200mm

9mm Thickness







WOOD





600x1200mm

9mm Thickness

4 Face 8 Face













Finish

WOOD

600x1200mm | 9mm Thickness | 1 Face

600x600mm | 8.5mm Thickness | 2 Fac





600x1200mm | 9mm 600x600mm | 8.5m

9mm Inickness
85mm Thickness







500x1200mm | 9mm Thickness | 1 Face 500x600mm | 8.5mm Thickness | 2 Face







600x1200mm | 600x600mm

9mm Thickness

























600x1200mm | 9

9mm Thickness

Pace 2 Face







600x1200mm | 600x600mm |

9mm Thickness







600x1200mm | 9mm Thickness | 5 Face 600x600mm | 8.5mm Thickness | 10 Fac

WOOD






600x1200mm

9mm Thickness



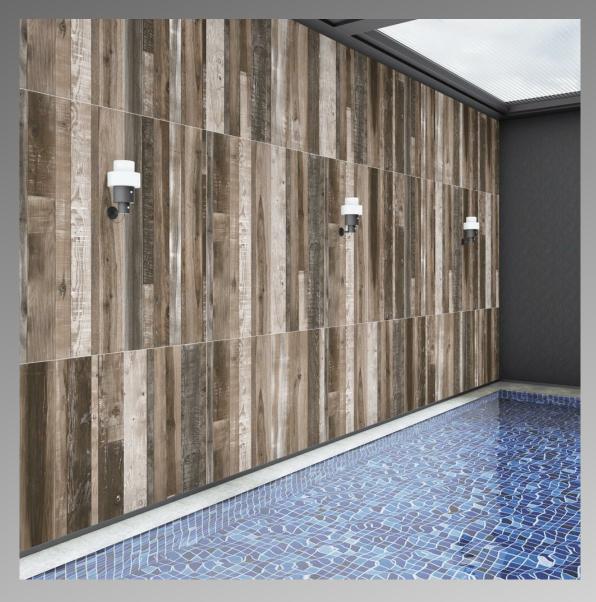



Technical Detail

SRNO.	CHARACTERISTICS	ISO TEST METHODS	TILES REQUIREMENT AS PER ISO 13006 : 2012 GROUP B LLB	SISCON VALUE	
-------	-----------------	------------------	---	--------------	--

DIMENSION & SURFACE QUALITY

1	Deviation in length & Width	ISO 10545-2	+/-0.5%	+/-0.2%	
	Deviation in Thickness	ISO 10545-2	+/-5%	+/-3%	
	Straightness Of sides	ISO 10545-2		+/-0.2%	
4	Rectangularity	ISO 10545-2	+/-0.5%	+/-0.2%	
5	Surface Flatness	ISO 10545-2	+/-0.5%	+/-0.2%	

PHYSICAL & THERMAL PROPERTIES

	Water Absorption	ISO 10545-3	<0.50%	< 0.04%
2	Mohs Hardness	EN-101	Min.5	Min.5
	Flexural Strength			
4	Skid Resistance	ISO 10545-17	>0.4	>0.4
5	Breaking Strength	ISO 10545-11	>1113N	>1800N
6	Frost Resistance	ISO 10545-12	Frost Proof	Frost Proof
7	Thermal Shock Resistance	ISO 10545-9	No Damage	No Damage
	Moisture Expansion			Nil
	Resistance to surface Abrasion			

CHEMICAL PROPERTIES

Chemicals Resistance	No Damage	
Stain Resistance	Resistant	

PACKAGING DETAIL

SIZE	PCS./BOX	SQM./BOX	APPROX WEIGHT/BOX	THICKNESS
				9мм
				8.5MM